




Marine Safety Unit Pittsburgh Waterways Information



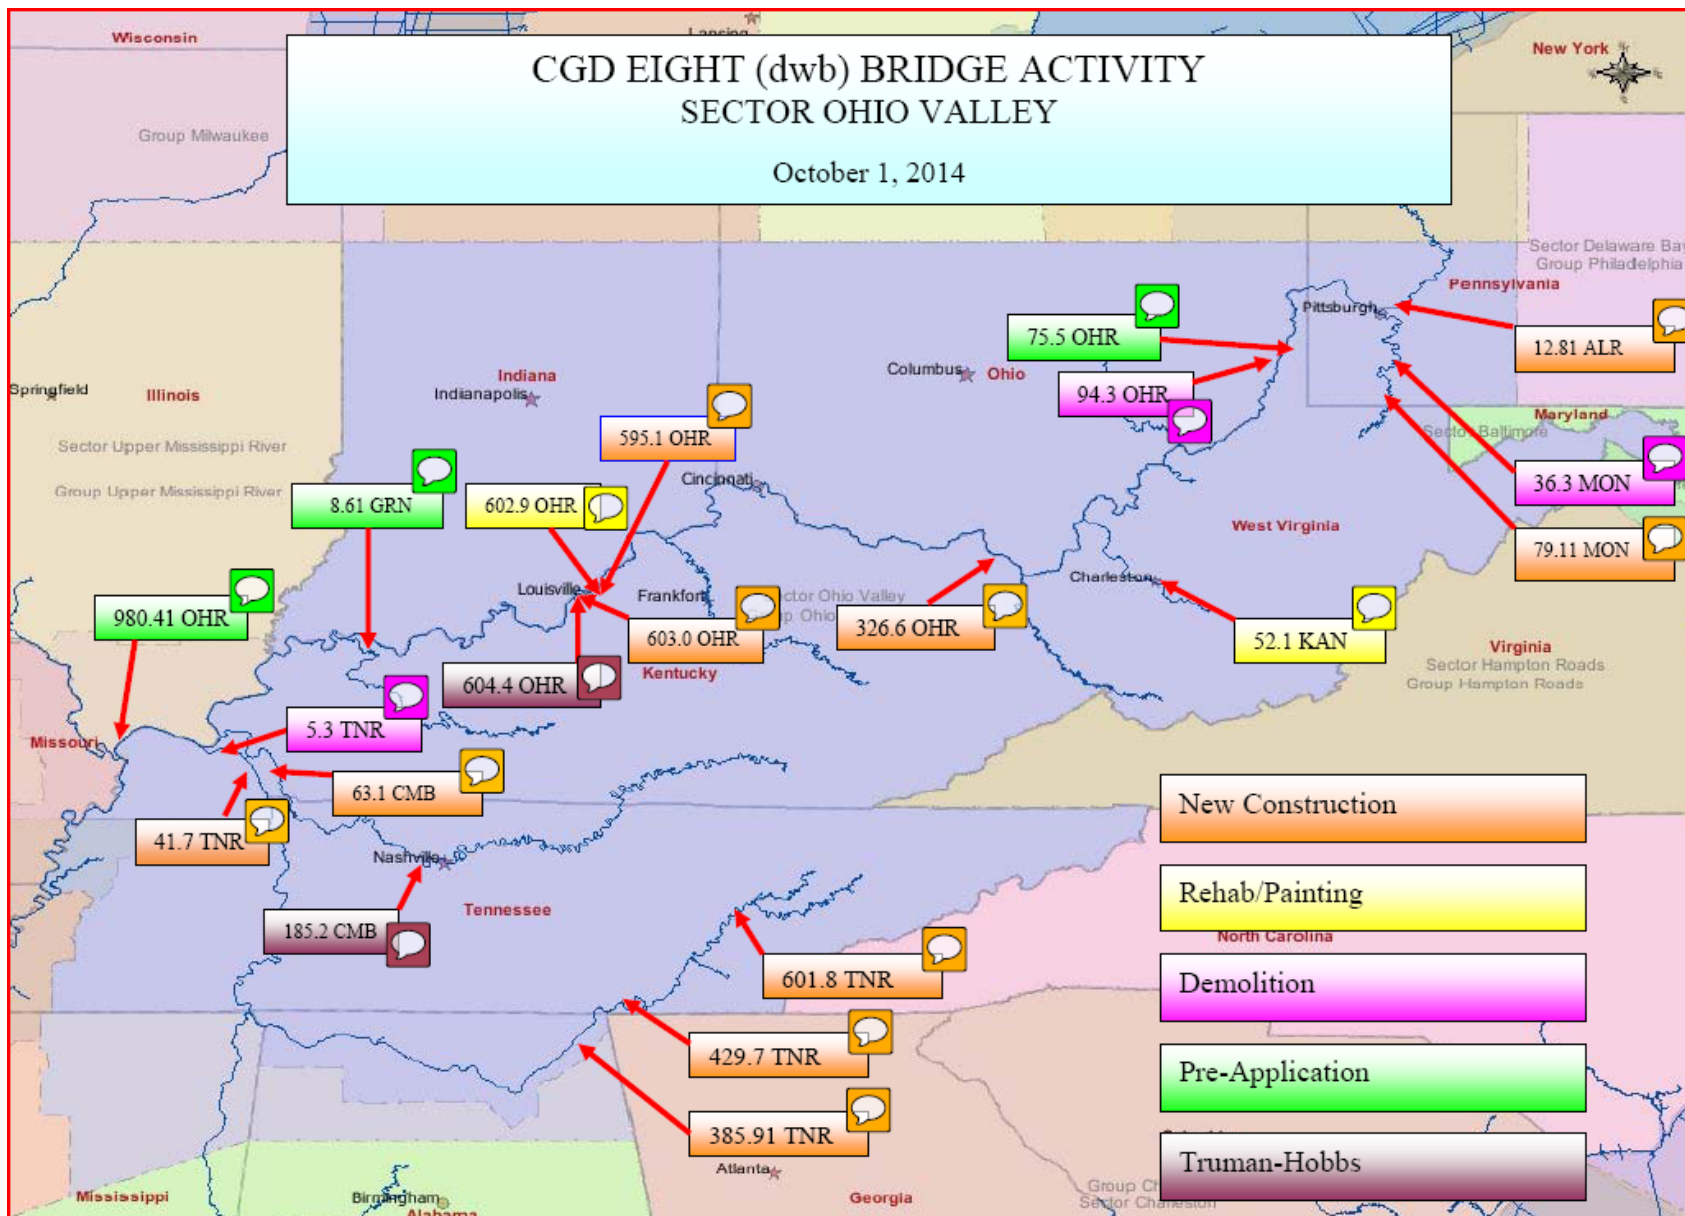

Marine Safety Unit Pittsburgh Waterways Information

Monongahela River

MONONGAHELA RIVER

MILE 79.1 - BRIDGE CONSTRUCTION

Masontown Bridge Replacement; Pier construction of both right and left descending channel piers is underway. The channel is clear of floating plant and 344 feet of channel clearance will be maintained during pier construction.

LMN: 46-13


MILE 2.3 - BRIDGE OPERATION

Birmingham Bridge; Due to construction, a temporary access platform extends approximately 4 feet below low steel thereby reducing the vertical clearance to 60.8 feet above pool stage.

LMN: 42-14

Demolition Plan for the Donora Webster Bridge in Washington PA

An estimated safety zone will be a minimum of 1000 feet. The bridge is at mile 36.3 on the Monongahela River. Demolition date is not set but anticipated early December 2014 or as late as July 2015.

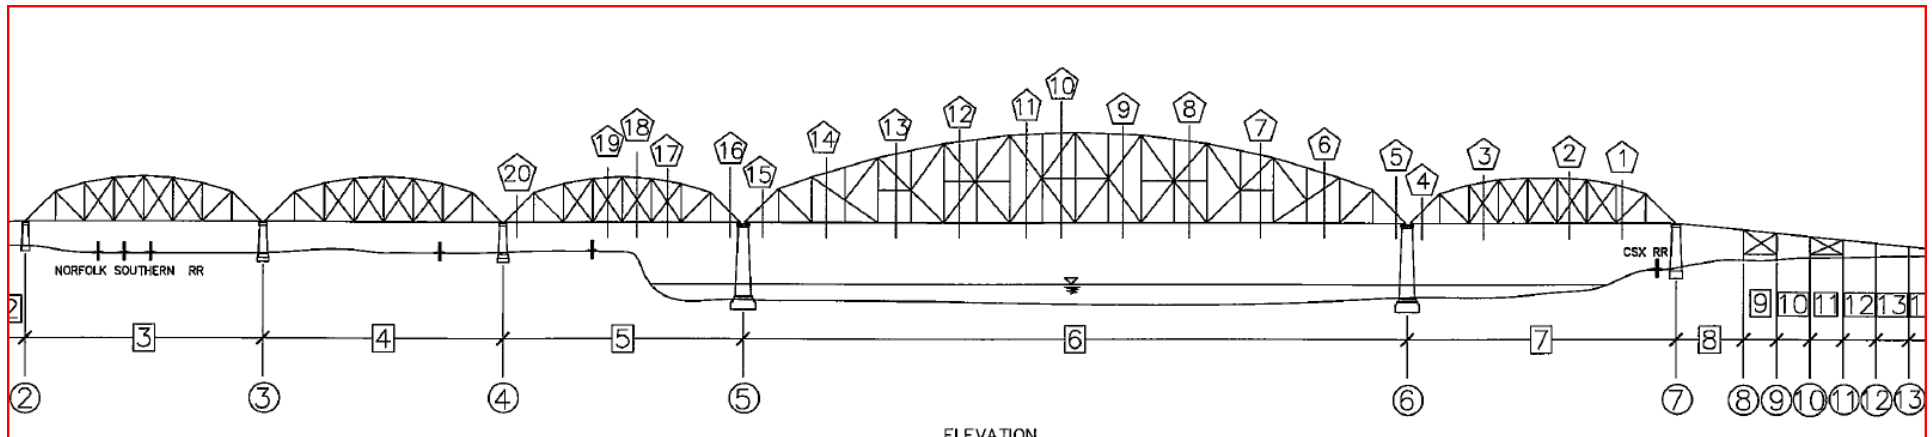



Marine Safety Unit Pittsburgh Waterways Information



Allegheny River

ALLEGHENY RIVER

MILE 45.1 - BRIDGE MAINTENANCE

Kittanning Bridge; Vertical clearance is reduced to 41.6 feet below low steel due to a containment extending below low steel. Work will be conducted on the bridge Monday through Friday, during daylight hours, until April 2015. For additional information, mariners may contact the Kittanning Truss Bridge Crew via VHF-FM Channel 16 or by cell phone at (412) 600-2690.

LNМ: 10-14

MILE 12.81 - REPLACEMENT BRIDGE

Oakmont (Hulton) Replacement Bridge; Cofferdam construction has begun for the subject bridge, Monday through Saturday, during daylight hours. A 375-foot navigation channel will be maintained during the construction. Mariners may contact the M/V Max K via VHF-FM Channel 13 or the work crew at (412) 292-7384, for additional information.

LNМ: 46-14

MILE 12.8 - TEMPORARY PRIVATE AIDS TO NAVIGATION

The Pennsylvania Department of Transportation has installed 25 Temporary Unlighted Exclusion Area Buoys, 6 Temporary Unlighted Controlled Area Buoys and 12 Temporary Lateral Buoys to temporarily mark areas to avoid and to aid navigation of the recreational mariner during the construction phases of a new bridge at approximate Mile 12.8 upstream of the Hulton/Oakmont Bridge in Harmar Township and Oakmont Borough, Allegheny County, Pennsylvania. These temporary buoys shall remain on location until completion of the new bridge span. Mariners may directly contact the Pennsylvania Department of Transportation, Mr. James Foringer, PENNDOT District 11-0, 45 Thoms Run Road, Bridgeville, PA 15017 or phone (412) 429-5000. Mariners are advised to exercise caution in this vicinity and to completely avoid navigating outside of the navigable channel in the area.

LNМ: 25-14

The Oakmont (Hulton) Bridge: Is preparing to perform the stand jacking of the main river crossing section of the Hulton bridge in late December of 2014 they will be requesting a complete closure of the Allegheny Navigation Channel for 48 hours. The current schedule has them performing this work between this Christmas and New Year's Day with no specific days yet identified.



Marine Safety Unit Pittsburgh
Waterways Information



USCG Safety Zone/Marine Events:

Start Date	End Date	Event	Waterway	Time	Closure
12/28/14	12/28/14	Pittsburgh Steeler/Steelers Fireworks	ALL 0.0-0.3 OHR 0.0-0.1	2000 - 2030	Full
12/31/14	12/31/14	First Night Pittsburgh	ALL 0.5-1	1800-0000	Full

Towing Vessel Subchapter M- The latest Unified Agenda now indicates that the publication of Sub "M" is planned for August 2015.

MSU Pittsburgh Unit Move is moving – 10-12 December 2014

New address:
1041 Washington Pike
Suite 300
Bridgeville, PA 15107

Office Phone number: (412) 221-0807
Marine Safety Unit Duty Officer (remains the same): (412) 670-4288